

Ø 12mm Drill Thru
[.472in]


16.10mm
[.634in]

A

A

M10-1.5 Tap

Ø 17mm±0.25
[.669in±.010]

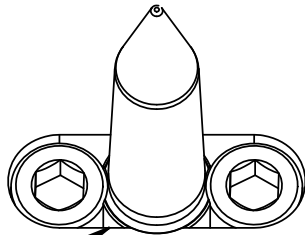

Do Not Slot Fastener Holes
Slotting the Fastener Pocket
Reduces Support to the Pilot Body

Ø 19mm^{+0.021}₀
[.748in^{+.0008}_{-.0000}]

32mm
[1.260in]
Min.

16.50mm Ref.
[.650in]

15.50mm±0.05
[.610in±.002]

R0.76mm Max.
[.030in]

SECTION A-A


DO NOT SCALE DRAWING

REV 1

Pilot-PA-T-16mm-3.2mm-F-Machining


This product may be covered by one or more patents or patent applications.
See <http://www.standardlifters.com/patents.html> for details.

STANDARD LIFTERS INC




1 Hold Down

PA-T-16mm-3.2mm-25mm-3-A-F1

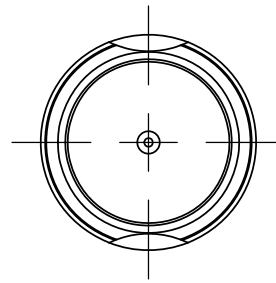

2 Hold Downs

PA-T-16mm-3.2mm-25mm-3-A-F2

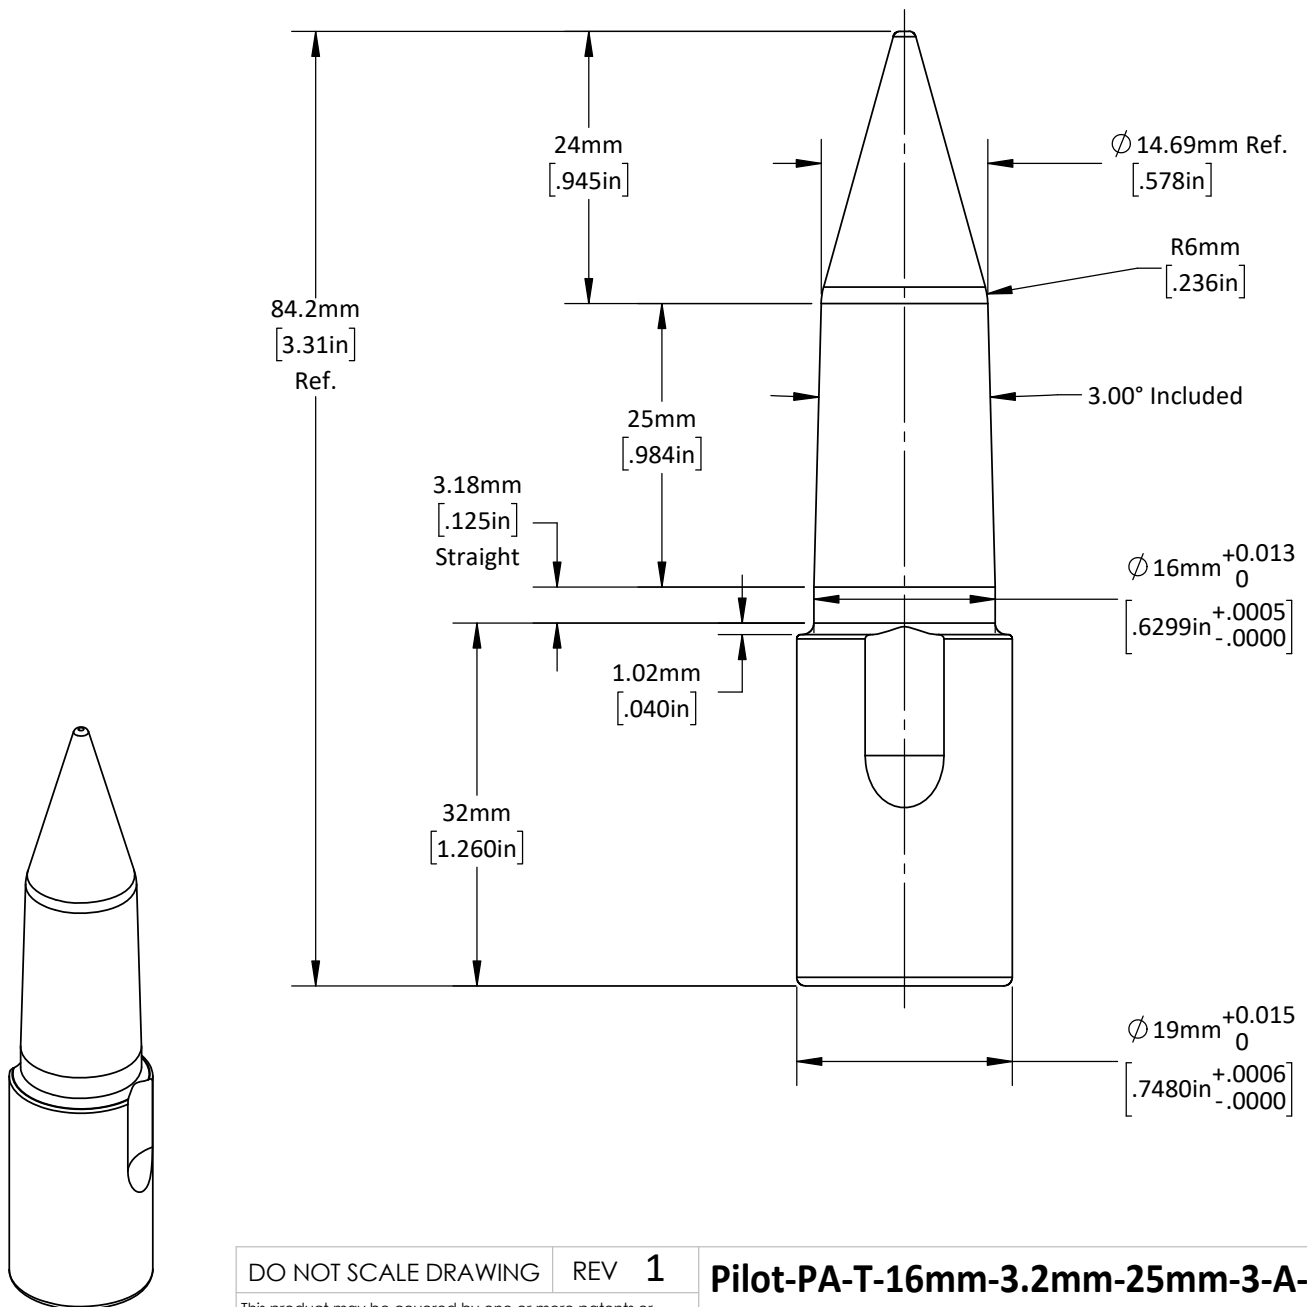

DO NOT SCALE DRAWING

REV 1

Pilot-PA-T-16mm-3.2mm-25mm-3-A-F1 / F2

This product may be covered by one or more patents or patent applications.
See <http://www.standardlifters.com/patents.html> for details.

STANDARD LIFTERS INC